

I. Overview

The SS-22 AC single-phase motor speed controller adopts a new-type electronic circuit, featuring small size, high precision, wide speed regulation range and low power consumption. It enables feedback constant speed and stepless speed regulation for single-phase motors. It is widely used in industries like packaging & printing, instruments & meters, garment machinery and medical equipment, and can be interchangeably used with similar products manufactured by Japan Oriental Motor Co., Ltd. and Taiwan Shangyang Motor Co., Ltd.

II. Main Technical Specifications

1. Working voltage: AC220V 50/60Hz, voltage fluctuation range $\pm 10\%$ Ue;
2. Rated power: 6W, 15W, 25W, 40W, 60W, 120W, 180W, 200W, 250W;
3. Speed regulation range: 90-1400r/min (50Hz); 90-2800r/min (60Hz);
4. Pollution degree: Class 3;
5. Protection class: IP40;
6. Ambient temperature: $-5 \sim +40$;
7. Relative humidity: 90%;
8. Altitude: 2000m;
9. Mounting method: 35mm guide rail;

①

V. Usage Instructions

1. The speed controller starts slowly when powered on, featuring a soft-start function.
2. Motor models compatible with this product: 5-wire motors with speed measurement wires (e.g., YYDJ, YCJT, YYCJ, YCJFK).


VI. Ordering Instructions

When placing an order, please specify the product model, power, and quantity.


Example: SS-22 60W 500 units

②

III. Wiring Diagram

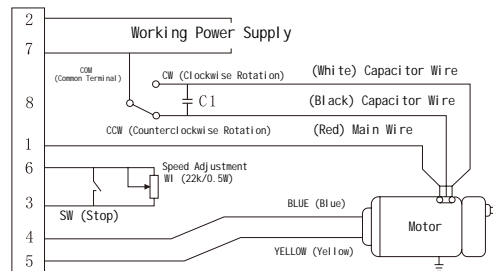

IV. Outline and Mounting Hole Dimension Drawing (mm)

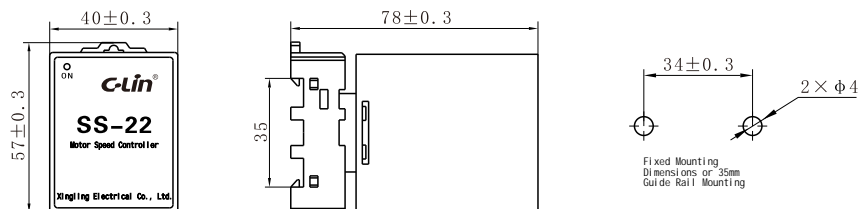

②



C-Lin
欣灵电气股份有限公司
XINLING ELECTRICAL CO., LTD.

Address: No. 328, Welsli 19th Road, Yueqing Economic Development Zone, Zhejiang Province
Telephone: 0577-42735555 Fax: 0577-42722943
Official Website: www.c-lin.cn Email: c-lin@xlnl.com
Technical Consultation: 400-8236-775



Mini AC Single-Phase Motor Speed Controller Products Instructions

C-Lin 欣灵

使用说明
Products Instructions

SS-22

Mini AC Motor Speed Controller (with Soft-Start Function)

Thank you very much for using C-Lin products!
Please read the user manual before use!

08A003P0